


JABSCO Light Duty Bilge Pumps

PAR Light Duty pumps are inexpensive yet have performance and features of higher priced pumps. Self-priming allows pump to be mounted above bilge and sump areas with only the intake hose in the bilge. Diaphragm design allows pumps to run dry for extended periods without damage and has low amp draw. Tough plastic body has ports for 3/4" ID hose. Pumpgard Model 42600-0000 supplied.

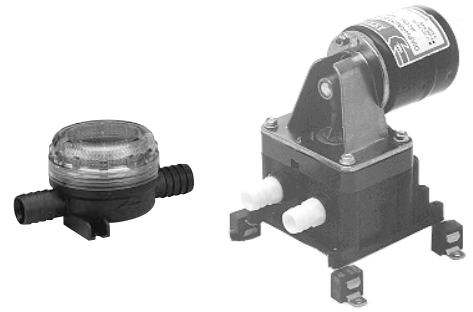

ORDER NO.	PRICE
ITT 369602000	\$301.75

JABSCO Light Duty Bilge Pump

Light Duty pumps are inexpensive yet have performance and features of higher priced pumps. Self-priming allows pump to be mounted above sump areas with only the intake hose in the bilge. Ports are 3/4"



ORDER NO.	VOLTS	AMPS/FUSE	FLOW	PRICE
ITT 372020000	12 Vdc	7.5/10	4.5	\$189.10

JABSCO Medium Duty Bilge Pump

Self-priming, can be remotely mounted in a high and dry location. Unique run-dry diaphragm design. Belt drive and rubber mounting pads reduce noise and vibration. Long life permanently lubricated bearings. Inlet and outlet ports for 3/4" ID Hose.



ORDER NO.	PRICE
ITT 366000000	\$455.00

JABSCO Pump W/Motor

- 12Vdc model, fuse 15 amp.
- Self priming up to 10ft vertical lift, allows mounting above wet bilges.
- 645 gph open flow output.
- Quiet Operation
- Diaphragm design allows extended dry running.
- Large Surge Chamber for Even Water Flow
- Permanently lubricated ball bearings add to pump life.
- Large Vibration Absorbing Pads
- Corrosion Resistant Materials Throughout for Sea Water Service

- Meets USCG Regulation 183.410 and ISO 8846 MARINE for Ignition Protection.
- Flow Requirements for Small Passenger Vessels.
- This pump listed as NMMA accepted.
- Complies with USCG 183.410 and ISO 8846 MARINE (Ignition Protection).
- ISO 8849 MARINE (Bilge Pump Standard).

SPECIFICATIONS
 Open Flow: 10.8 GPM
 Vert. Dry
 Suction Lift: 10 feet (3 m)
 Ports: 1" Slip-on Hose
 Weight: 13 lb (5,9 kg)



ORDER NO.	PRICE
ITT 346000000	\$623.62

JABSCO Wakeboard and Ski Boat Ballast Pump

This pump can deliver almost 80 pounds (10 gallons) of water ballast per minute.

- 12 Volt Pump with Nitrile Impeller
- Fills a typical 40 gallon ballast tank in under 5 minutes
- Reversible to both fill and empty ballast tanks
- Self-priming and non air-locking
- Exclusive Run-dry Protection shuts off pump before impeller is damaged

Fitting: Ports – 1/2" NPT internal thread and 1" External Hose Barb.
Size: 7-1/8" long x 4-3/4" wide x 3-5/8" high

ORDER NO.	PRICE
ITT 182201127	\$281.36



NEW